

- Wide 2 : 1 Input Range
- High Efficiency
- Regulated Outputs
- 1600V Isolation
- Full EMI Shielding
- PI Input Filter

FDC40 Series



Unit measures 2.6"W x 3"L x 0.375"H

MODEL SELECTIONS

Output Voltage	Output Amps	Input Range	Model Number	Price	
				1	10
SINGLE OUTPUT					
3.3 VDC	10	9-18 VDC	FDC40-12S33	\$104	\$99
	10	18-36 VDC	FDC40-24S33	\$104	\$99
	10	36-72 VDC	FDC40-48S33	\$104	\$99
5 VDC	8	9-18 VDC	FDC40-12S05	\$104	\$99
	8	18-36 VDC	FDC40-24S05	\$104	\$99
	8	36-72 VDC	FDC40-48S05	\$104	\$99
12 VDC	3.4	9-18 VDC	FDC40-12S12	\$104	\$99
	3.4	18-36 VDC	FDC40-24S12	\$104	\$99
	3.4	36-72 VDC	FDC40-48S12	\$104	\$99
15 VDC	2.7	9-18 VDC	FDC40-12S15	\$104	\$99
	2.7	18-36 VDC	FDC40-24S15	\$104	\$99
	2.7	36-72 VDC	FDC40-48S15	\$104	\$99
DUAL OUTPUT					
3.3 / 5 VDC	4 / 4	9-18 VDC	FDC40-12D3305	\$109	\$104
	4 / 4	18-36 VDC	FDC40-24D3305	\$109	\$104
	4 / 4	36-72 VDC	FDC40-48D3305	\$109	\$104
+/-5 VDC	+7 / -1	9-18 VDC	FDC40-12D05	\$109	\$104
	+7 / -1	18-36 VDC	FDC40-24D05	\$109	\$104
	+7 / -1	36-72 VDC	FDC40-48D05	\$109	\$104
+/-12 VDC	+/-1.8	9-18 VDC	FDC40-12D12	\$109	\$104
	+/-1.8	18-36 VDC	FDC40-24D12	\$109	\$104
	+/-1.8	36-72 VDC	FDC40-48D12	\$109	\$104
+/-15 VDC	+/-1.4	9-18 VDC	FDC40-12D15	\$109	\$104
	+/-1.4	18-36 VDC	FDC40-24D15	\$109	\$104
	+/-1.4	36-72 VDC	FDC40-48D15	\$109	\$104

**Contact
Factory
for
High Volume
Pricing**

- Wide 2 : 1 Input Range
- High Efficiency
- Regulated Outputs
- 1600V Isolation
- Full EMI Shielding
- PI Input Filter

FDC40 Series Continued

MODEL SELECTIONS

Output Voltage	Output Amps	Input Range	Model Number	Price	
				1	10
TRIPLE OUTPUT					
5, +/-12 VDC	4, +/-0.85	9-18 VDC	FDC40-12T0512	\$114	\$109
	4, +/-0.85	18-36 VDC	FDC40-24T0512	\$114	\$109
	4, +/-0.85	36-72 VDC	FDC40-48T0512	\$114	\$109
5, +/-15 VDC	4, +/-0.68	9-18 VDC	FDC40-12T0515	\$114	\$109
	4, +/-0.68	18-36 VDC	FDC40-24T0515	\$114	\$109
	4, +/-0.68	36-72 VDC	FDC40-48T0515	\$114	\$109

**Contact
Factory
for
High Volume
Pricing**

ASTRODYNE *CostCutter* Isolated and Regulated 40 Watt Modular DC/DC Converters

All specifications are typical at nominal input, full load, and 25DegC unless otherwise noted

INPUT SPECIFICATIONS

Input Voltage Ranges:	
12 VDC Nominal	9-18 VDC
24 VDC Nominal	18-36 VDC
48 VDC Nominal	36-72 VDC
Input Filter	Pi Type

OUTPUT SPECIFICATIONS

Voltage and Current Load Regulation	See Selection Chart singles: +/-0.5% duals: +/-1% triples: 5 V: +/-2%, Aux: +/-5%
Line Regulation	singles: +/-0.5% duals: +/-1% triples: 5V: +/-2%, Aux: +/-5%
Temperature Coefficient	+/-0.02%/DegC
Ripple/Noise	1% Pk-Pk of Vout, typ
Voltage Stability (singles/duals) (triples)	+/- 2% 5 V: +/-2%, Aux: +/-5%
Short Circuit Protection	Continuous, self-recovering
Overvoltage Protection Threshold:	
3.3V Output	3.9Volts
5V Output	6.2Volts
12V Output	15Volts
15V Output	18Volts

GENERAL SPECIFICATIONS

On/Off Control	(Ref to - Input pin) Logic "1"/Open=ON Logic "0"/GND=OFF
Input-Out Isolation	1600VDC
Isolation Resistance	10000 M Ohms
Efficiency	82%, typ
Switching Frequency	185Khz, typ


ENVIRONMENTAL SPECIFICATIONS

Oper. Temperature	-25 to +85 DegC (see derate)
Storage Temperature	-55 to +125 DegC *
Maximum Case Temp	100 DegC *
MTBF	229.4 kHrs MIL-HDBK-217F TA=25C FL

PHYSICAL SPECIFICATIONS

Case Material	Nickel-Coated Copper Non-Conductive Base
Construction	Fully Encapsulated
Weight	4.5 oz, (126g)

MECHANICAL DIMENSIONS

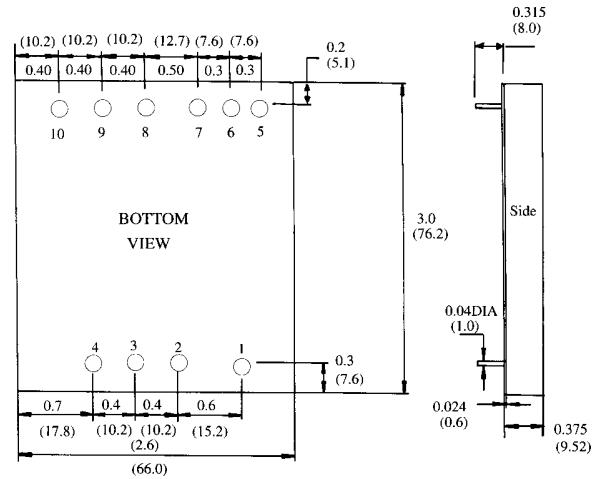


Notes: 1. All dimensions are typical in inches (mm).

PIN PITCH TOLERANCE ±0.5mm

Pin #	Single	Dual	Triple
1	Ctrl	Ctrl	Ctrl
2	+ Vin	+ Vin	+ Vin
3	- Vin	- Vin	- Vin
4	Sync	Sync	Sync
5	+ OutS	+ Vout or 3.3 out	+ Vout
6	Trim	Com	Com
7	- OutS	- Vout or 5 out	- Vout
8	+ Vout	Trim	+5 Out
9	- Vout	No Pin	-5 Out
10	No Pin	No Pin	Trim

OUTPUT DERATING CURVE

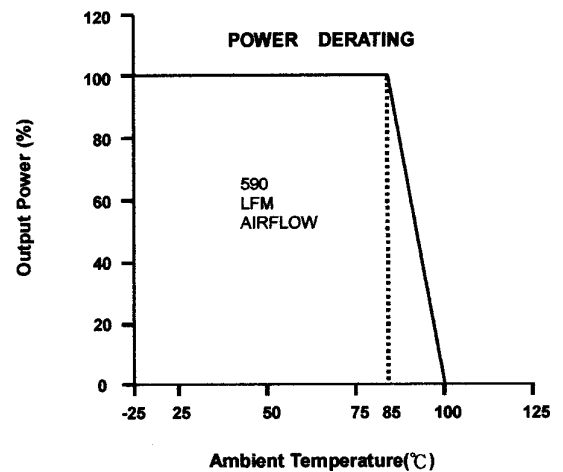

Astrodyne products are not authorized or warranted for use as critical components in life support systems, equipment used in hazardous environments, nuclear controls systems, or other mission-critical applications.

* These are stress ratings. Exposure of the devices to any of these conditions may adversely affect long term reliability. Proper operation under conditions other than the standard operating conditions is neither warranted nor implied.